

Grass Hinges

Maverick Hardware

CS22

Click-on & Twin


Quick Mounting Hinge (CS22)

G*GRASS

The star in your cabinet

Features

- Opening angle 110°
- 3 dimensional adjustment
- Offered in 2 boring pattern
- For face frame and frameless cabinets
- All metal hinge, nickel plated
- Available with Twin toolless technology
- Soft Close® compatible



Cranking 00

Full Overlay


Click-on

Knock-in
Knock-in Free Swing
Screw-on
Screw-on Free-Swing

45/9.5 Boring

48/9 Boring

MECS22D
MECS22

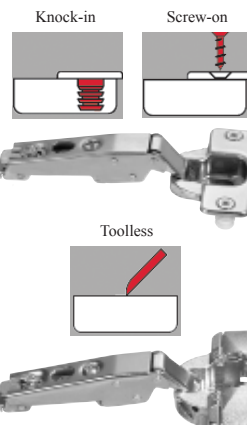

Drilling Distance (TA) Cranking 00

		*3	4	5	6	7		
D	20					0		
O	19				0			
O	18			0		2		
R	17		0		2			
O	16	0		2		4		
V	15		2		4			
E	14	2		4				
R	13		4					
L	12	4						
A								
Y	Max							

*3mm only with Click-on hinges

Cranking 08

Half Overlay


Click-on

Knock-in
Knock-in Free Swing
Screw-on
Screw-on Free-Swing

45/9.5 Boring

48/9 Boring

MECS22D08
MECS22-08

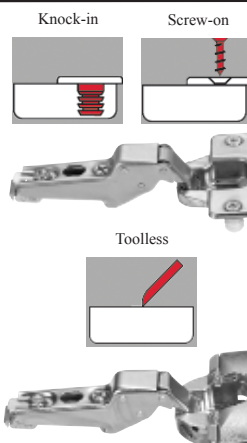

Drilling Distance (TA) Cranking 08

		*3	4	5	6	7		
D	12					0		
O	11				0			
O	10			0		2		
R	9		0		2			
O	8	0		2		4		
V	7		2		4			
E	6	2		4				
R	5		4					
L	4	4						
A								
Y	Max							

*3mm only with Click-on hinges

Cranking 15

Inset


Click-on

Knock-in
Knock-in Free Swing
Screw-on
Screw-on Free-Swing

45/9.5 Boring

48/9 Boring

MECS22D15
MECS22-15

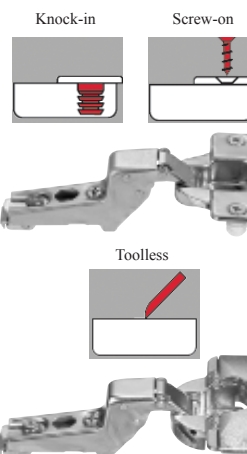

Drilling Distance (TA) Cranking 15

		*3	4	5	6	7		
R	0		2					
E	1	2		4				
V	2		4					
E								
L								
M								
I								
N								

*3mm only with Click-on hinges

CS29

Click-on & Twin

Quick Mounting Hinge (CS29)

- Opening angle 125°
- 3 dimensional adjustment
- Offered in 2 boring pattern
- For face frame and frameless cabinets
- All metal hinge, nickel plated
- Available with Twin toolless technology
- Soft Close® compatible




Cranking 00

Full Overlay

Drilling Distance (TA) Cranking 00

<u>Click-on</u>	<u>45/9.5 Boring</u>	<u>48/9 Boring</u>
Knock-in	----	MECS29D
Knock-in Free Swing	----	----
Screw-on	----	----
Screw-on Free-Swing	----	----
<u>Twin</u>	<u>45/9.5 Boring/ 48/9 Boring</u>	
Toolless	MECS29T	
Toolless Free-Swing	----	



		*3	4	5	6	7	
D	20						
O	19				0		
O	18			0			
R	17		0		2		
O	16	0		2			
V	15		2		4		
E	14	2		4			
R	13		4				
L	12	4					
A							
Y	Max						


*3mm only with Click-on hinges

Cranking 08

Half Overlay

Drilling Distance (TA) Cranking 08

<u>Click-on</u>	<u>45/9.5 Boring</u>	<u>48/9 Boring</u>
Knock-in	---	---
Knock-in Free Swing	---	---
Screw-on	---	---
Screw-on Free-Swing	---	---
<u>Twin</u>	<u>45/9.5 Boring/ 48/9 Boring</u>	
Toolless	---	
Toolless Free-Swing	---	



		*3	4	5	6	7	
D	12						
O	11						
O	10						
R	9		0		2		
O	8	0		2			
V	7		2		4		
E	6	2		4			
R	5		4				
L	4	4					
A							
Y	Max						

*3mm only with Click-on hinges

Maverick Hardware

CS65

Click-on & Twin

Wide angle quick mounting hinge (CS65)

- Opening angle 170°
- Offered in 2 boring patterns
- For face frame and frameless cabinets
- All metal hinge, zinc-diecast, nickel plated
- Available with Twin toolless technology
- Opening angle can be restricted to 120°
- 100% finger protection
- Soft-Close® compatible



G*GRASS

The star in your cabinet

Drilling Distance (TA) Cranking 00

		*3	4	5	6	7	8	
D	21							0
O	20					0		
O	19				0		2	
R	18			0		2		
O	17		0		2		4	
V	16	0		2		4		
E	15		2		4			
R	14	2		4				
L	13		4					
A	12	4						
Y	Max							

*3mm only with Click-on hinges

Cranking 00

<u>Click-on</u>	<u>45/9.5 Boring</u>	<u>48/9 Boring</u>
Knock-in	---	MECS65D
Screw-on	---	MECS65

Full Overlay

Cranking 00

<u>Twin</u>	<u>45/9.5 & 48/9 Boring</u>
Toolless	MECS65T

Full Overlay

Knock-in



Screw-on



Cranking 08

<u>Click-on</u>	<u>45/9.5 Boring</u>	<u>48/9 Boring</u>
Knock-in	---	MECS65D08
Screw-on	---	MECS65-08

Half Overlay

Cranking 08

<u>Twin</u>	<u>45/9.5 & 48/9 Boring</u>
Toolless	MECS65T08

Half Overlay

Drilling Distance (TA) Cranking 08

		*3	4	5	6	7	8	
D	14							
O	13						0	
O	12					0		
R	11				0		2	
O	10			0		2		
V	9		0		2		4	
E	8	0		2		4		
R	7		2		4			
L	6	2		4				
A	5		4					
Y	Max							

*3mm only with Click-on hinges

CS05

Click-on & Twin

Quick mounting hinge (CS05)

- Opening angle 95°
- 3-dimensional adjustment
- Offered in 2 boring patterns
- For face frame & frameless cabinets
- All metal hinge, nickel-plated
- Available with Twin toolless technology
- Ideal for pocket & flap doors
- Soft-close® compatible



G* GRASS

The star in your cabinet

Drilling Distance (TA) Cranking 00

		*3	4	5	6		
D	19				0		
O	18			0			
O	17		0	2			
R	16	0	2				
O	15		2	4			
V	14	2		4			
E	13		4				
R	12	4					
L							
A							
Y	Max						

*3mm only with Click-on hinges

Cranking 00

Full Overlay

Click-on **45/9.5 Boring** **48/9 Boring**
Knock-in --- MECS05D

Cranking 00

Full Overlay

Twin **45/9.5 & 48/9 Boring**
Toolless MECS05T


Cranking 08

Half Overlay


Click-on **45/9.5 Boring** **48/9 Boring**
Knock-in --- MECS05D08

Knock-in

Screw-on



Toolless



Drilling Distance (TA) Cranking 08

		*3	4	5	6		
D	11				0		
O	10			0			
O	9		0	2			
R	8	0	2				
O	7		2	4			
V	6	2		4			
E	5		4				
R	4	4					
L							
A							
Y	Max						

*3mm only with Click-on hinges

Cranking 08

Half Overlay

Twin **45/9.5 & 48/9 Boring**
Toolless MECS05T08


Cranking 15

Inset

Click-on **45/9.5 Boring** **48/9 Boring**
Knock-in --- MECS05D15

Knock-in

Screw-on



Toolless



Drilling Distance (TA) Cranking 15

		*3	4	5	6		
R	11		2		4		
E	10	2		4			
V	9		4				
E							
L							
M							
I							
N							

*3mm only with Click-on hinges

Cranking 15

Inset

Twin **45/9.5 & 48/9 Boring**
Toolless MECS05T15

Maverick Hardware

CS25

Click-on

Quick mounting hinge for profile doors (CS25)

- Opening angle 95°
- 3-dimensional adjustment
- For face frame & frameless cabinets
- All metal hinge, nickel-plated
- 40mm cup
- Excellent weight capacity with heavy profile doors

G* GRASS

The star in your cabinet

Drilling Distance (TA) Cranking 00

		*3	4	5	6	7	8	9	10	11
D	23								0	
O	22							0		2
O	21						0		2	
R	20					0		2		4
O	19				0		2		4	
V	18			0		2		4		
E	17		0		2		4			
R	16	0		2		4				
L	15		2		4					
A	14	2		4						
Y	13		4							
	Max									

*3mm only with Click-on hinges

Cranking 00

Click-on

Screw-on

Full Overlay

48/9 Boring

MECS25

Cranking 08

Click on

Screw-on

Half Overlay

48/9 Boring

MECS25-08

Cranking 15

Click-on

Screw-on

Inset

48/9 Boring

MECS25-15





CS05/20/6 and 05/30/2

Click-on & Twin

Quick mounting hinge for 20° angle corner solutions (CS05/20/6)

- Opening angle 95°
- 3-dimensional adjustment
- Offered in 2 boring patterns
- All metal hinge, nickel-plated
- Available with Twin toolless technology
- Soft-close® compatible

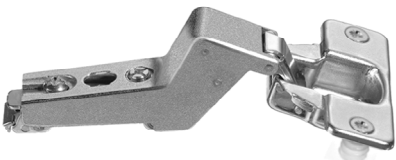

Click-on 45/9.5 Boring 48/9 Boring
Screw-on --- MECS05/20/6



Drilling Distance (TA) Inset



		*3	4	5	6				
R	7				0				
E	6			0					
V	5		0		2				
E	4	0		2					
L	3		2		4				
	2	2		4					
M	1		4						
I									
N									

*3mm only with Click-on hinges

Click-on & Twin

Quick mounting hinge for 30° angle corner solutions (05/30/2)

- Opening angle 95°
- 3-dimensional adjustment
- Offered in 2 boring patterns
- All metal hinge, nickel-plated
- Available with Twin toolless technology
- Soft-close® compatible

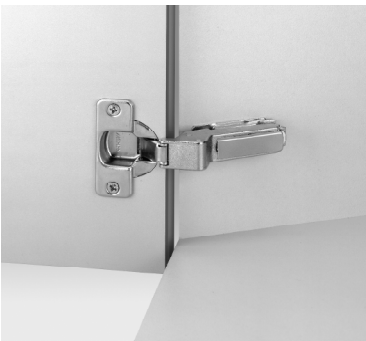

Click-on 48/9 Boring
Screw-on MECS05/30/2



Drilling Distance (TA)

		*3	4	5	6				
D	16				0				
O	15			0					
O	14		0		2				
R	13	0		2					
O	12		2		4				
V	11	2		4					
E	10		4						
R	9	4							
L									
A									
Y	Max								



*3mm only with Click-on hinges

Section A-4: Grass Hinges

G* GRASS
The star in your cabinet

Quick mounting hinge for 45° angle corner solutions (CS05/45/3)

-



Twin **45/9.5 & 48/9 Boring**
Toolless MECS05/45/3T

[illegible]

		4	5	6			
D	16	0.1	0.1	0.1			
O	18	0.2	0.2	0.2			
O	19	0.1	0.1	0.1			
R	20	0.2	0.2	0.2			
T	22	0.1	0.1	0.1			
H	24	0.2	0.2	0.2			
I	26	0.1	0.1	0.1			
C	28	0.2	0.2	0.2			
K	30	0.1	0.1	0.1			
N							
E							
S							
S							


CS05/90/4

Click-on & Twin

Quick mounting post hinge (CS 05/90/4)

For inset blind corner cabinet applications

- Opening angle 95°
- 3-dimensional adjustment
- Offered in 2 boring patterns
- All metal hinge, nickel-plated
- Available with Twin toolless technology
- Soft-close compatible



The star in your cabinet

Drilling Distance (TA)
CS05/90/4D & 4T

		*3	4	5	6				
R	0		2		4				
E	1	2		4					
V	2		4						
E									
L									
M									
I									
N									

*3mm only with Click-on hinges

Maverick Hardware


CS29/-14/-24

Click-on & Twin

14° negative angle quick mounting hinge (CS29/-14)

- Opening angle 125°
- 3-dimensional adjustment
- Offered in 2 boring patterns
- All metal hinge, nickel-plated
- Available with Twin toolless technology

Click-on **48/9 boring**
Screw-on **MECS29/-14**

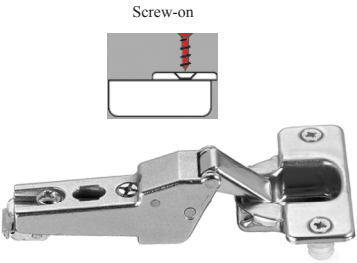

G*GRASS

The star in your cabinet

Drilling Distance (TA) CS 29/-14

		*3	4	5	6			
D	11				0			
O	10			0				
O	9		0	2				
R	8	0		2				
O	7		2		4			
V	6	2		4				
E	5		4					
R	4	4						
L	3							
A								
Y	Max							


*3mm only with Click-on hinges

Click-on & Twin

24° negative angle quick mounting hinge (CS29/-24)

- Opening angle 125°
- 3-dimensional adjustment
- Offered in 2 boring patterns
- All metal hinge, nickel-plated
- Available with Twin toolless technology

Click-on **48/9 boring**
Screw-on **MECS29/-24**

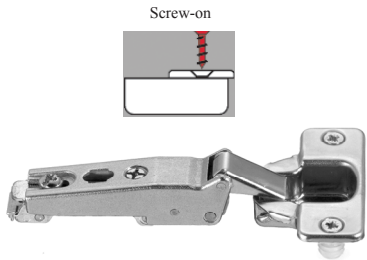

Drilling Distance (TA) CS29/-24

		*3	4	5	6			
D	19				0			
O	18			0				
O	17		0	2				
R	16	0		2				
O	15		2		4			
V	14	2		4				
E	13		4					
R	12	4						
L	11							
A								
Y	Max							

*3mm only with Click-on hinges

CS29/-45

Click-on & Twin

Quick mounting hinge (CS29/-45)

- Opening angle 125°
- Negative angle 45°
- 3-dimensional adjustment
- Offered in 2 boring patterns
- All metal hinge, nickel-plated
- Available with Twin toolless technology

Screw-on



Click-on 48/9 boring
Screw-on MECS29/-45



The star in your cabinet

Drilling Distance (TA) CS29/-45

		*3	4	5	6			
D	12				0			
O	11			0				
O	10		0		2			
R	9	0		2				
O	8		2		4			
V	7	2		4				
E	6		4					
R	5	4						
L	4							
A								
Y	Max							

*3mm only with Click-on hinges

Drilling Distance (TA) CS29/-45

			4	5	6			
D	12				0			
O	11			0				
O	10		0		2			
R	9			2				
O	8		2		4			
V	7			4				
E	6		4					
R								
L								
A								
Y	Max							

*3mm only with Click-on hinges

Maverick Hardware

CSPCC

Click-on


Pie cut corner quick mounting hinge (CSPCC)

- All metal PCC hinge, nickel-plated
- Designed for use in corner cabinets w/folding doors
- 3-dimensional adjustment



The star in your cabinet

Click-on **48/9 boring**
Knock-in **MECSPCCD**
Screw-in **MECSPCC**



CSPCC

<u>Door thickness</u>	16	17	18	19	20	21	22
<u>Distance</u>	25	24	22	21	20	18	17
<u>Mounting plate thickness</u>	04	04	02	02	02	00	00

17GL/00 and Cover Plates

Click-on

Quick mounting glass door hinge 17GL/00

- Opening angle 95°
- 3-dimensional adjustment
- Self-closing
- Ø 26mm cup
- Steel nickel plated arm
- Black plastic hinge cup



The star in your cabinet

Drilling Distance (TA) Cranking 00

		4	5	6					
D	19			0					
O	18		0						
O	17	0		2					
R	16		2						
O	15	2		4					
V	14		4						
E	13	4							
R									
L									
A									
Y	Max								

Click-on	Part #
Glass door	MEGDCS17/00
Glass door	MEGDCS17/08
Glass door	MEGDCS17/15


Cover plates 17GL

Plastic

Oblong	Part #
Nickel, velour	MEGDCS17PO-VN
Nickel, textured	MEGDCS17PO-NI
Brass, textured	MEGDCS17PO-BR
Black	MEGDCS17PO-BK



The star in your cabinet



Cover plates 17GLPR

Plastic


Round	Part #
Nickel, velour	MEGDCS17PR-VN
Stainless steel	MEGDCS17PR-SS
Nickel, textured	MEGDCS17PR-NI
Brass, textured	MEGDCS17PR-BR
Black	MEGDCS17PR-BK



Specialty Hinges

Institutional hinge

- Opening angle 270°
- 3-dimensional adjustment
- Maximum overlay 16mm (5/8")
- Lines up in 32mm system
- ANSI2-Grade 2
- Metal hinge, nickel-plated



Cranking 00

Slide-on	48/9 boring
Screw-on	MESSP270



Cut depth Cranking 00

		6	5	4	3	2	1	0
D	16	0						
O	15		0					
O	14	2		0				
R	13		2		0			
O	12	4		2		0		
V	11		4		2		0	
E	10			4		2		0
R	9				4		2	
L	8					4		2
A	7						4	
Y	6							4
	Max							

Maverick Hardware

Specialty Hinges

Specialty Plates SSPBX


Institutional plate

- Zinc die-cast plate, nickel-plated
- Wood screw fixing

<u>Thickness</u>	<u>Part #</u>
00	MESSPBX00
02	MESSPBX02
04	MESSPBX04

G* GRASS

The star in your cabinet



Specialty Hinges

No-bore glass door hinge

- Opening angle 180°
- Direct mounting on cabinet sidewall
- Inset application
- Includes self-adhesive pads
- Thickness of glass: 4-6mm

G* GRASS

The star in your cabinet



Left hand top, Right hand bottom

<u>Hinge</u>	<u>Part #</u>
Screw-on	MEGDH-1
Screw-on	MEGDH-2
Pull	MEGD-P

Specialty Hinges

Tri-view mirror hinge

- Opening angle 90°
- For medicine cabinets with wooden or steel doors
- Concealed self-locking hinge, top and bottom mount,
For mirror cabinets and variable angle cabinets without partition
- Universal left and right handed assembly


G* GRASS

The star in your cabinet

<u>Color</u>	<u>Hinge part #</u>	<u>Plate part #</u>	<u>Center plate part #</u>
White	METVM-W	METVM-P	METVM-C



METVM-W



METVM-P



METVM-C

Specialty Hinges

Flap Door Hinge

MEFH

- Opening angle 90°
- For flap door thickness up to 20mm
- Cup boring cover
- Bottom & flap door are flush inside the cabinet when doors are open
- 3-D adjustable

G* GRASS

The star in your cabinet



Click-on Mounting Plates

Click-on Mounting Plates


Frameless construction-Screw on

- Fixing distance 37mm
- Line boring 32mm
- Nickel Plated Finish

<u>Thickness</u>	<u>Part#</u>
00	MECSBX00C3H
02	MECSBX02C3H
04	MECSBX04C3H
08	MECSBX08C3H

G* GRASS

The star in your cabinet



Click-on Mounting Plates


Frameless Construction- with Euroscrew

- Fixing distance 37mm L
- Line boring 32mm
- Nickel Plated Finish

<u>Thickness</u>	<u>Part#</u>
00	MECSBX00CES3H
02	MECSBX02CES3H
04	MECSBX04CES3H
08	MECSBX08CES3H

G* GRASS

The star in your cabinet




Click-on Mounting Plates

Face frame construction

Part #
MECSFF-INSET

G* GRASS

The star in your cabinet




Click-on Mounting Plates

Face frame construction

<u>Thickness</u>	<u>Part#</u>
00	MECSFF00CS
02	MECSFF02CS
04	MECSFF04CS
08	MECSFF08CS

G* GRASS

The star in your cabinet



Maverick Hardware

Face Frame Hinges




Face Frame Hinges (ACC180/181)

The newest generation of 3-D face frame hinges

- Opening angle 108°
- 3-dimensional adjustment
- Offered in 2 boring patterns
- All metal hinge, nickel-plated
- Cup depth only 10.5mm (7/16")
- For door thicknesses from 12.5mm (1/2") to 19mm (3/4")
- Wrap around face frame mounting
- Soft-close® ACC compatible

G*GRASS

The star in your cabinet

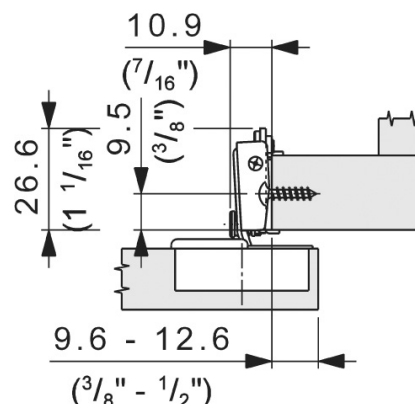

1/2"

ACC	45/9.5 boring	48/9 boring
Knock-in	---	MEACC180-1/2D
Screw-on	---	---

3/4"

ACC	48/9 boring
Knock-in	MEACC180-3/4D

Cover Caps & Screws

Cover caps available for Click-on & Twin hinges

G*GRASS

The star in your cabinet

<u>Part #</u>	<u>Description</u>	<u>22/05/25</u>	<u>29</u>	<u>Specialty hinges</u>	<u>17GL</u>
MECSHC00-BK	Black plastic cap	00 cranking	00 cranking	---	08 cranking

Cover caps available for Click-on & Twin hinges with soft-close®

<u>Part #</u>	<u>Description</u>	<u>22/05</u>	<u>29</u>	<u>Specialty hinge</u>	<u>17GL</u>
MECSHC00-NI	Nickel-plated cover cap	00 cranking	00 cranking	---	---
MECSHC08-NI	Nickel-plated cover cap	08/15 cranking	08 cranking	All	---

UniSoft

GRUNISOFT

Why is the UniSoft the ideal Soft-close adaptor?

- Works for face frame cabinets on all door overlays
- Works for frameless cabinets on full overlay doors
- Blends in well with hinge finish
- Is non-handed with a low profile design
- Is manually adjustable to desired closing speed
- Is easy to mount by locating in the corner
- Has scratch protector and front bumper with cushion for a quiet close

G*GRASS

The star in your cabinet

